


规格参数

| | | |
|--------------|----------------------------------|---|
| 显示功能 | 显示尺寸 | 15" |
| | 分辨率 | 1024×768 |
| | 亮度 | 400cd/m2 (可调) |
| | 对比度 | 400: 1 |
| | 触摸屏 | 5线AMT电阻式触摸屏 |
| | 液晶屏 | LCD工业级液晶显示屏 |
| 系统配置 | 处理器 | 标配Intel酷睿2双核P8600 CPU, 2.4GHZ主频, CPU功耗25W (可选P8700 CPU), 支持其他GM45芯片组系列CPU (可自购) |
| | 芯片组 | Intel GM45+ICH9-M |
| | 内存 | 标配DDR3 2G内存, 2条DDR3内存扩展槽可扩展到4G、8G |
| | 存储器 | 标配SSD 32G (可升级64G、128G、256G), 可选择2.5英寸SATA机械硬盘320G/500G/1TB |
| | 系统 | 标配XP (可选Win7、Win8、Linux) |
| I/O接口 | 网口 | 2×10/100/1000Mbps RJ45网口, 网口芯片RTL8111E |
| | 串口 | COM1×RS485 (默认为4pin凤凰端子接口RS485), COM2-COM5×RS232/485 (DB9针接口默认为RS232) |
| | USB | 4×USB 2.0端口 |
| | 显示 | 1×VGA, 1×HDMI, 集成Intel GMA X4500显示芯片, 最大共享显存达128MB (可选双VGA输出) |
| | 音频 | 外接1×MIC-in, 1×Line-out (可选内置2W喇叭), 集成声卡芯片ALC662 |
| | 其他 | 2×PCI, 1×8路GPIO (可选), 1×PS/2 (可选), 1×LPT (可选) |
| 扩展选配 | 1×SIM卡槽, 2×min-pcie(可选wifi和3G功能) | |
| 看门狗 | 256级, 可编程 | |
| 散热方式 | 风扇机壳散热 | |
| 整机功耗 | 〈50W | |
| 工作环境 | 环境温度-20℃-60℃, 环境湿度5%-90% (无凝结状态) | |
| 存储环境 | 环境温度-20℃-60℃, 环境湿度5%-90% (无凝结状态) | |
| 电源 | 支持DC9V-25V输入, 标配12V8A电源适配器 | |
| 开关 | 电源开关、薄膜开关(配遥控器) | |
| 机壳材质 | 高强度铝合金拉丝面板、防护等级 IP65; 钣金材质后壳喷漆 | |
| 机箱颜色 | 黑色 | |
| 净重量 | 5.85kg | |
| 安装方式 | 面板嵌入式、VESA标准支撑臂 | |
| 外形尺寸(mm) | 376.5×303.5×80.1 | |
| 嵌入式开口尺寸 (mm) | 353.4×279.4 | |

订购信息

| 型号 | 配置 | 配置描述 |
|----------|------|--|
| PPC-150D | 标准配置 | P8600 CPU, 2.4G主频, 2G内存, 32G硬盘(XP), 1个VGA/HDMI, 2个千兆网口, 1组音频孔, 4×USB, 5×COM |
| | 标配配件 | 12V8A 电源适配器, RS485 接头, 电源三脚线 |
| | 升级选配 | P8700 CPU, 其他 GM45 芯片组系列 CPU (可自购), 4G 内存, SSD 64G/128G/256G 硬盘; 320G/500G 机械硬盘. LPT 接口/PS2 接口/GP IO接口/wifi 模块/3G 模块/内置喇叭 |

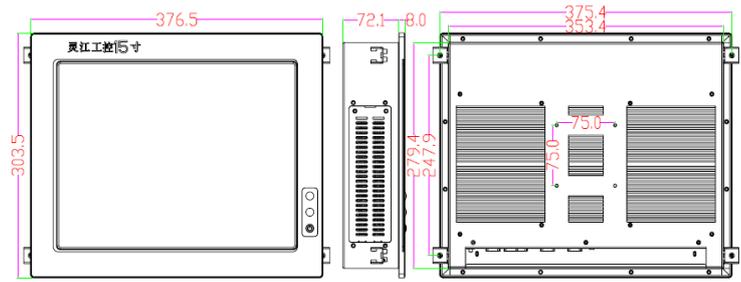

Features

| | | |
|-----------------|--------------|---|
| Display | Size | 15" |
| | Resolution | 1024×768 |
| | Brightness | 400cd/m2 (Adjustable) |
| | Contrast | 400: 1 |
| | Touch Screen | 5-wire AMT resistive touch screen |
| | LCD screen | industrial LCD display |
| System | CPU | Intel Core 2 dual P8600 CPU, 2.4GHZ, CPU Power Consumption 25W (optional P8700 CPU) |
| | Chipset | Intel GM45+ICH9-M |
| | Memory | Onboard DDR3 2G , Max 8G |
| | Storage | SSD 32G (up to 64G/128G/256G) , Optional 2.5 Inch SATA HDD 320G/500G/1TB etc. |
| | System | XP/Win7/Linux/Win8 |
| I/O | Lan | 2×10/100/1000Mbps RJ45 LAN, Lan chip RTL8111E |
| | Serial Port | COM1×RS485 (default RS485) , COM2-COM5×RS232/485 (default RS232) |
| | USB | 4×USB 2.0 |
| | Display | 1×VGA, 1×HDMI, Integrated Intel GMA X4500 |
| | Audio | 1×MIC-in, 1×Line-out (optional 2W Built-in speaker) , Integrated ALC662 |
| | Others | 2×PCI, 1×8-wires GPIO (optional) , 1×LPT (optional) , 1×PS/2 (optional) |
| Patulous Option | | 1×SIM, 2×min-pcie(wifi/3G optional) |
| Watchdog Timer | | 1-255s, Programmable |
| Thermal methods | | Fanless |
| Consumption | | <50W |
| Working Temp. | | -20℃-60℃, Humidity 5%-90% (Non-condensing) |
| Storage Temp. | | -20℃-60℃, Humidity 5%-90% (Non-condensing) |
| Power | | Wide voltage 9V~25V, 12V/8A Power adapter |
| Switch ON/OFF | | Switch, Membrane Switch(remote control) |
| Shell Material | | High-strength aluminum brushed pane;IP65; Spray painting |
| Color | | Black |
| Net Weight | | 5.85kg |
| Installation | | Embedded mounted、VESA rack mounted |
| Dimensions (mm) | | 376.5×303.5×80.1 |
| Hole size (mm) | | 353.4×279.4 |

Order information

| Model | Configuration | Description |
|----------|---------------|---|
| PPC-150D | Standard | P8600 CPU, 2.4G, 2G/SSD 32G, 1×VGA/HDMI, 2×LAN, 1×audio, 4×USB, 5×COM |
| | Accessories | 12V/8A Power adapter, Power line, RS485 connector |
| | Optional | P8700 CPU, 4G/SSD 64G/128G/256G, HDD:320G/500G ;LPT/PS2/GP/wifi/3G/Built-in speaker |