
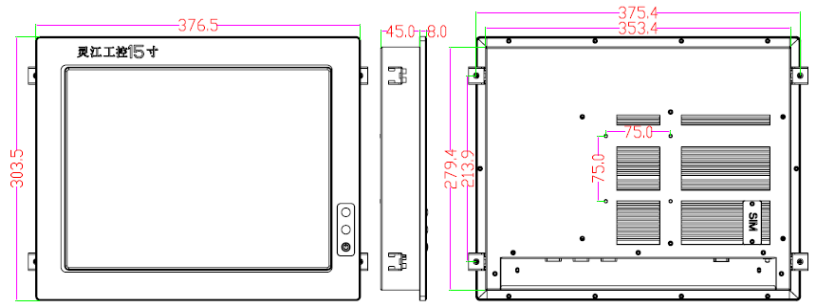


规格参数

型 号		PPC-150C	PPC-150P
显示功能	显示尺寸	15"	
	分辨率	1024×768	
	亮度	400cd/m2(可调)	350cd/m2
	对比度	400: 1	
	触摸屏	5线AMT电阻式触摸屏	5线国产电阻式触摸屏
	液晶屏	LCD工业级液晶显示屏	
系统配置	处理器	Intel Atom N2800 双核 1.86GHZ主频, CPU功耗6.5W	
	芯片组	Intel Atom N2800+NM10	
	内存	标配板贴2G内存颗粒, 内存槽可扩展DDR3 2G, 整机最大支持4G	
	存储器	标配SSD 32G(可升级64G、128G、256G), 可选择2.5英寸SATA机械硬盘320G/500G/1TB	
	系统	标配XP(可选Win7、Win8、Linux)	
I/O接口	网口	2×10/100/1000Mbps RJ45网口, 网口芯片RTL8111E	
	串口	COM1×RS485/RS422(默认为4pin凤凰端子接口RS485, 带光电隔离支持自动数据流控), COM2-COM3×RS232/485(DB9针式接口默认为RS232); COM4×RS232(DB9针式接口)(另可选增2个DB9针式接口RS232串口)	
	USB	标配外设4×USB2.0端口, (另可选增2个USB2.0端口)	
	显示	集成Intel GMA3650显示芯片, 外置1×VGA、1×HDMI	
	音频	集成声卡ALC662, 可选1×MIC-in, 1×Line-out或2W内置喇叭	
	其他	1×8路GPIO(可选), 1×LPT(可选), 1×PS/2(可选)	
扩展选配	1×SIM卡槽, 2×min-pcie(可选wifi和3G功能)		
看门狗	256级, 可编程		
散热方式	无风扇机壳散热		
整机功耗	〈20W		
工作环境	温度-40℃-80℃, 湿度5%-90%(无凝结状态)	温度-20℃-60℃, 湿度5%-90%(无凝结状态)	
存储环境	温度-40℃-80℃, 湿度5%-90%(无凝结状态)	温度-20℃-60℃, 湿度5%-90%(无凝结状态)	
电源	支持9V~25V宽压输入, 标配12V5A电源适配器		
开关	电源开关、薄膜开关(配遥控器)	电源开关	
机壳材质	高强度铝合金拉丝面板、防护等级 IP65; 钣金材质后壳喷漆		
机箱颜色	黑色	银灰色	
净重量	5.05kg		
安装方式	嵌入面板式、VESA标准支撑臂		
外形尺寸(mm)	376.5×303.5×53		
嵌入式开口尺寸(mm)	353.4×279.4		

订购信息

型 号	PPC-150C	PPC-150P
标准配置	15寸AMT电阻式触摸屏, 黑色机壳, 红外线遥控器	15寸国产电阻触摸屏, 银灰色机壳
	N2800 CPU, 1.86G主频, 2G内存, 32G硬盘(XP系统), 分辨率1024×768, 4×USB, 4×COM, 2×LAN, 1×VGA, 1×HDMI	
标准配件	12V5A电源适配器, 电源三脚线, 4组嵌入式安装扣, RS485接头,	
升级选配	4G内存, 64G/128G/256G等大容量硬盘, 3G/WIFI模块, LPT/PS2接口, 音频/内置喇叭等	

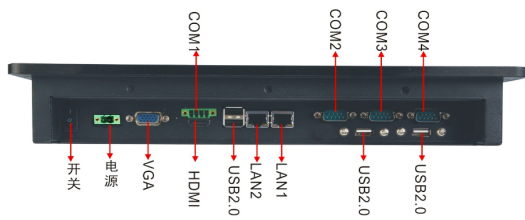

Features

Model		PPC-150C	PPC-150P
Display	Size	15"	
	Resolution	1024×768	
	Brightness	400cd/m2 (adjustable)	350cd/m2
	Contrast	400: 1	
	Touch Screen	5-wire AMT resistive touch screen	5-wire China resistive touch screen
	LCD screen	industrial LCD display	
System	CPU	Intel Atom N2800 Dual 1.86GHZ, CPU Power Consumption 6.5W	
	Chipset	Intel Atom N2800+NM10	
	Memory	Onboard 2G RAM MAX 4G	
	Storage	SSD 32G (Up to 64G/128G/256G), Optional 2.5 Inch SATA HDD 320G/500G/1TB etc.	
	System	XP/Win7/Linux/Win8	
I/O	Lan	2×10/100/1000Mbps RJ45 LAN, Lan chip RTL8111E	
	Serial Port	COM1×RS485/RS422 (default RS485 with Optical isolation), COM2-COM3×RS232/485 (default RS232); COM4×RS232 (optional add 2 RS232)	
	USB	4×USB2.0, (optional add 2×USB2.0)	
	Display	Integrated Intel GMA3650, 1×VGA、1×HDMI	
	Audio	Integrated ALC662, optional 1×MIC-in, 1×Line-out/2W Built-in speaker	
	Others	1×GPIO (optional), 1×LPT (optional), 1×PS/2 (optional)	
Patulous Option		1×SIM, 2×min-pcie(wifi/3G optional)	
Watchdog Timer		1-255s, Programmable	
Thermal methods		Fanless	
Consumption		<20W	
Working Temp.		-40℃-80℃, Humidity 5%-90% (Non-condensing)	-20℃-60℃, Humidity 5%-90% (Non-condensing)
Storage Temp.		-40℃-80℃, Humidity 5%-90% (Non-condensing)	-20℃-60℃, Humidity 5%-90% (Non-condensing)
Power		Wide voltage 9V~25V, 12V/5A Power adapter	
Switch ON/OFF		Switch, Membrane Switch(remote control)	Switch
Shell Material		High-strength aluminum brushed pane;IP65; Spray painting	
Color		Black	Silver
Net Weight		5.05kg	
Installation		Embedded mounted、VESA rack mounted	
Dimensions (mm)		376.5×303.5×53	
Hole size (mm)		353.4×279.4	

Order information

Model	PPC-150C	PPC-150P
Configuration	15 inch AMT resistive touch screen, remote control	15 inch China resistive touch screen, Sliver
	N2800 CPU/1.86G/2G/SSD 32G (XP) / 1024×768/4×USB/4×COM/2×LAN/1×VGA/1×HDMI	
Accessories	12V/5A Power adapter, Power line, 4 sets embedded Install button, RS485 connector	
Optional	4G/SSD:64G/128G/256G, 3G/WIFI, LPT/PS2, AUDIO/Built-in speaker etc.	